


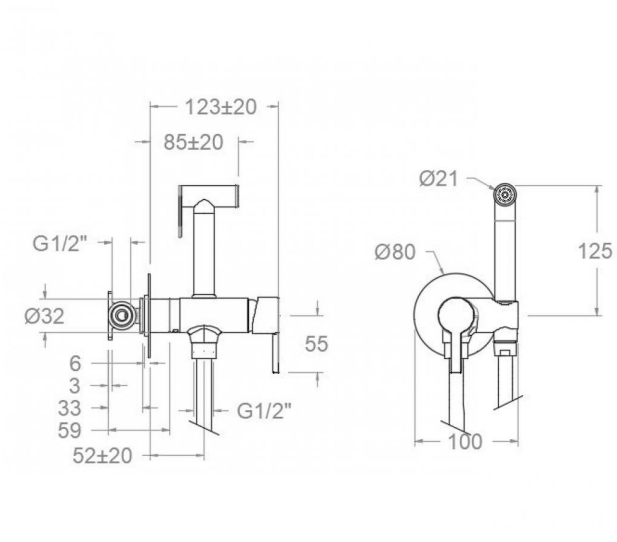

WC Magnet by Ramon Soler, concealed single lever for WC with shattaf set, chromed

336801WC

Collection: Wc	**Finish:** Chrome	**Code:** 99F302081
Location: Bath	**Category:** Wc	

Technical characteristics

- Ceramic cartridge Ø25 mm.
- Flow rate at 3 bar: 8 l/min.
- Thermal shock resistent and anti-Legionella chemical.
- Guarantee of 5 year for tapware and 3 years for accesories.
- Use pressure between 1-5 bar. Recomended pressure 3 bar.
- Resists static pressure equal to or less than 10 bar and water hammer up to 25 bar.
- 3 bar acoustic level less than 20 dB.
- Comfort benefits of fidelity, sensibility and constancy in temperature selection.
- Recommended temperature of use from 15°C to 55°C. Maximum use temperature 65°C. Maximum 1h at 90°C
- Chromed surface: 15 microns thick of nickel and 0.3 microns thick of chrome.

Tests

- Water tightness, flow rate, mechanical behavior under pressure, mechanical resistance, dimensional, acoustical and corrosion test according to european standards EN 817 and EN 248.

Composition and spare parts

Hand shower:	9552 (230037)
Shower flexible hose:	247903C (99Z307905)
Handle:	3300-25 (33Z302683)
Wall plate:	FXX6801 (AAZ302656)
Cartidge:	25000-2 (214341)
Cartridge nut cover:	4970 (252843)
Shower connector:	RD11M (AAZ302655)
Shirt concealed:	CEMP3201 (AAZ306323)
Cartridge nut:	TSC256 (AAZ306246)
Index:	DT3-CN (253032)