ramonsoler.


ACCESORIOS

COLEX2 INOX COLUMNA MONOMANDO 2 VIAS PARA EXTERIOR HERCULES

COLEX2 | CODE SAP 99Z309569

COLLECTION	FINISH	LOCATION	CATEGORY
Accesorios	Inox	Accesorios y recambios	



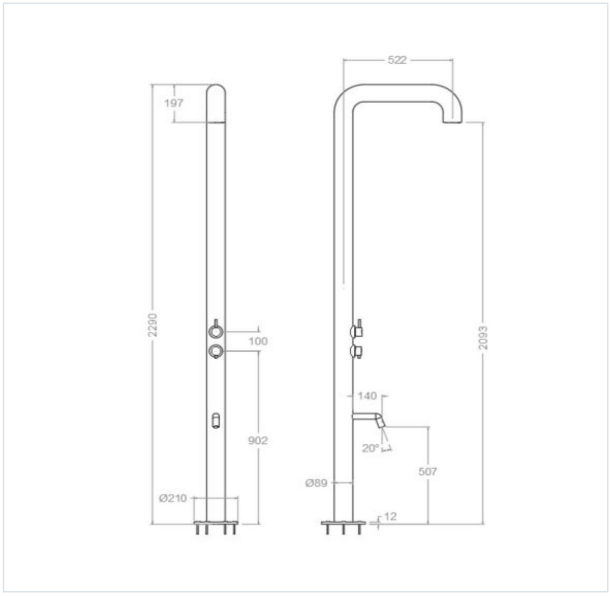

TECHNICAL CHARACTERISTICS

- Ceramic cartridge Ø35 mm.
- Flow rate at 3 bar (43 PSI): 12 l/min.
- Anti-limescale nozzles system.
- Water outlet with rain effect.
- Uniform water outlet through all the shower head nozzles.
- Thermal shock resistent and anti-Legionella chemical.
- Guarantee of 5 year for tapware and 3 years for accesories.
- Use pressure between 1-5 bar (14.5-72.5 PSI). Recomended pressure 3 bar (43 PSI).
- Resists static pressure equal to or less than 10 bar (145 PSI) and water hammer up to 25 bar.
- 3 bar (43 PSI) acoustic level less than 20 dB.
- Comfort benefits of fidelity, sensibility and constancy in temperature selection.
- Recommended temperature of use from 15°C to 55°C. Maximum use temperature 65°C. Maximum 1h at 90°C
- Chromed surface: 15 microns thick of nickel and 0.3 microns thick of chrome.

TESTS

- Water tightness, flexion and torsion, outlet dispersion, mechanical resistance, flow rate and corrosion test according to to european standards EN 1112 and EN 248.

COMPOSITION AND SPARE PARTS

Handle wall plate	**EMT01**	AAZ313583
Joint kit	**BJR01**	AAZ314021
Diverter valve	**4000**	210849
Fixation bag	**BTS01**	AAZ314020
Aerator	**1612**	AAZ305743
Handle wheel	**VO0257**	99Z313575
Handle	**MA02-35**	99Z313573
Cartridge nut	**TSC3504**	AAZ313580
Cartidge	**35000-2**	300225
Cartridge nut cover	**CO02**	AAZ313578
Accesory bag	**TE02(x5)**	AAZ314022
Shower head	**RMCOLEX**	99Z304241
Bag of outputs	**BBO03**	AAZ313618
Escutcheon	**EMD01**	AAZ313586

INOX

rsramonsoler.com · C/ Vallespir, 26 Pol. Ind. Fontsanta, 08970 Sant Joan Despí · Barcelona

ramonsoler.

OBSERVATIONS

AISI 316

INOX

rsramonsoler.com · C/ Vallespir, 26 Pol. Ind. Fontsanta, 08970 Sant Joan Despí · Barcelona