ramonsoler.

ODISEA

390401 CHROME WASHBASIN S 5L ODISEA

390401 | CODE SAP 39A307053

COLLECTION	FINISH	LOCATION	CATEGORY
Odisea	Cromo	Baño	Lavabo



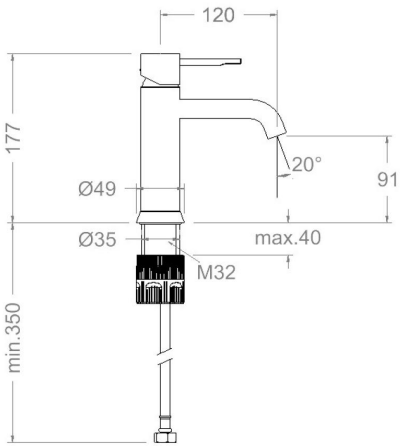

TECHNICAL CHARACTERISTICS

- Ceramic cartridge Ø35 mm.
- Flow rate: 5 l/min (stable for the range 1.5-5.5 bar (21,8-79.8 PSI) and temperature 15-55°C)
- Thermal shock resistent and anti-Legionella chemical.
- Guarantee of 5 year for tapware and 3 years for accesories.
- Use pressure between 1-5 bar (14.5-72.5 PSI). Recomended pressure 3 bar (43 PSI).
- Resists static pressure equal to or less than 10 bar (145 PSI) and water hammer up to 25 bar.
- 3 bar (43 PSI) acoustic level less than 20 dB.
- Comfort benefits of fidelity, sensibility and constancy in temperature selection.
- Recommended temperature of use from 15°C to 55°C. Maximum use temperature 65°C. Maximum 1h at 90°C
- Chromed surface: 15 microns thick of nickel and 0.3 microns thick of chrome.

TESTS

- Water tightness, flow rate, mechanical behavior under pressure, mechanical resistance, dimensional, acoustical and corrosion test according to european standards EN 817 and EN 248.

COMPOSITION AND SPARE PARTS

Handle	**3900L-35**	39Z307628
Index	**DT4-GN**	AAZ308134
Cartridge nut cover	**398002**	AAZ311831
Cartridge nut	**TSC3501**	AAZ312581
Cartidge	**35000-3**	252978
Wing nut	**TP3/8X2**	AAZ305358
Aerator	**1621**	AAZ307196
Base	**3930**	AAZ308146
Threaded tube	**CRF321**	AAZ308130
Nut thread tube	**TCR01**	AAZ305357
Felxible hose	**239**	AAZ301713